


**DATASHEET**




**Wiring Duct KVN.....**



Single-row perforation up to 60 mm wide

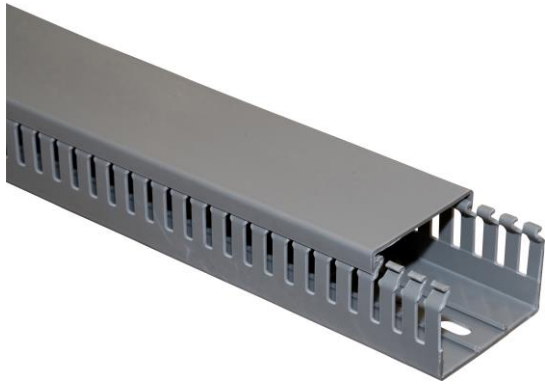

Three-row perforation over 80 mm wide

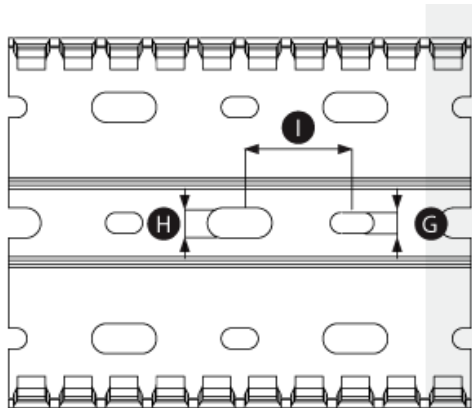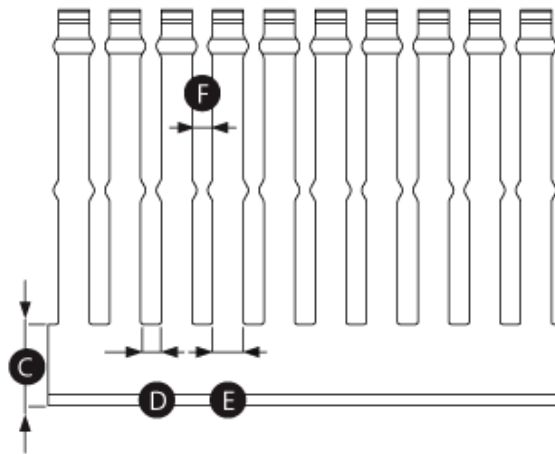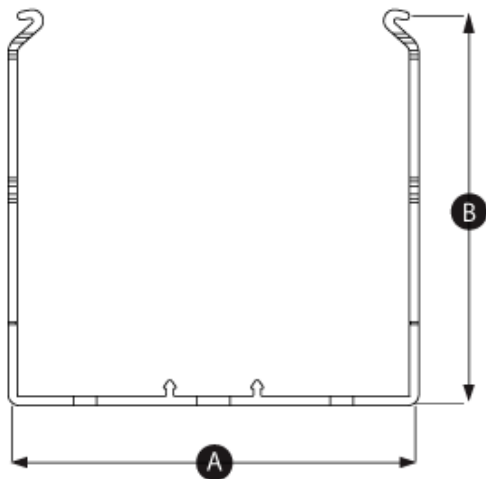

**General Product Information**

Insulating Material	PVC-UL 94 V0
Color	RAL 7030 Grey
<b>Operating Temperature</b>	
Minimum Temperature	-15°C
Maximum Temperature	+60°C

Article Number	Width	Height								Length
	A	B	C	D	E	F	G	H	I	U
	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]
KVN02540--	25	40	12,5	4	6	2,1	4,5	6,5	25	2000
KVN02560--	25	60	13,6	4	6	2,1	4,5	6,5	25	2000
KVN02580--	25	80	15,8	4	6	2,1	4,5	6,5	25	2000
KVN04040--	40	40	12,4	4	6	2,1	4,5	6,5	25	2000
KVN04060--	40	60	13,6	4	6	2,1	4,5	6,5	25	2000
KVN04080--	40	80	15,8	4	6	2,1	4,5	6,5	25	2000
KVN06040--	60	40	12,6	4	6	2,1	4,5	6,5	25	2000
KVN06060--	60	60	13,8	4	6	2,1	4,5	6,5	25	2000
KVN06080--	60	80	15,8	4	6	2,1	4,5	6,5	25	2000
KVN08060--	80	60	13,8	4	6	2,1	4,5	6,5	25	2000
KVN08080--	80	80	15,8	4	6	2,1	4,5	6,5	25	2000
KVN10060--	100	60	16	4	6	2,1	4,5	6,5	25	2000
KVN10080--	100	80	16	4	6	2,1	4,5	6,5	25	2000
KVN12060--	120	60	16,3	4	6	2,1	4,5	6,5	25	2000
KVN12080--	120	80	16,3	4	6	2,1	4,5	6,5	25	2000

 **TECHNICAL DATA**

Packaging	Lower and upper parts in a set
Delivery length	2m
Color	RAL 7030
Material	PVC, classified according to UL94: V-0